


MARQUEE


Clipframe Alloy Extrusions 6m & 9m - 3m Bays

6m Series

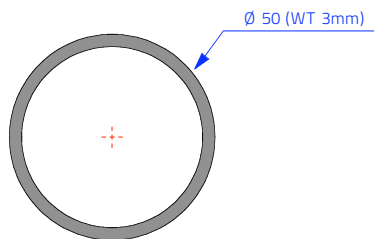


Ø 50 Tube Extrusion Profile

Uses: End Rafters / Hip Rafters / Legs / Eaves /
Ridge Purlins / Gable Uprights
Material:
6261T6 Anodised Aluminium
Ultimate Tensile Strength: 295 mpa
Yield Strength: 255 mpa

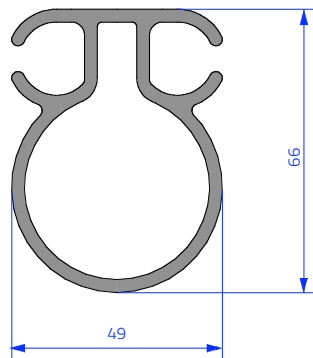

Channel Tube Light Extrusion Profile - 2 Track

Uses: Side Rafter
Material:
6261T6 Anodised Aluminium
Ultimate Tensile Strength: 295 mpa
Yield Strength: 255 mpa

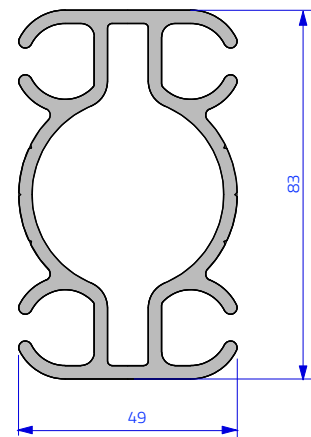


CAN BE USED AS ALTERNATIVE TO 2 TRACK:

Channel Tube Light Extrusion Profile - 4 Track


Uses: Side Rafter
Material:
6261T6 Anodised Aluminium
Ultimate Tensile Strength: 295 mpa
Yield Strength: 255 mpa

9m Series

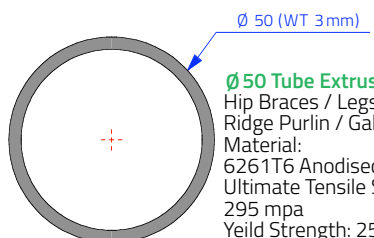


Ø 50 Tube Extrusion Profile

Hip Braces / Legs / Eaves /
Ridge Purlin / Gable Upright
Material:
6261T6 Anodised Aluminium
Ultimate Tensile Strength:
295 mpa
Yield Strength: 255 mpa

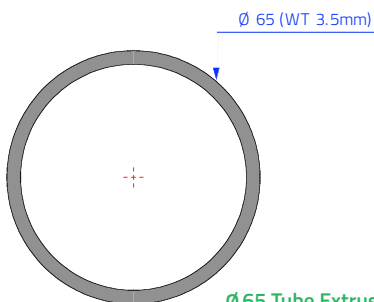


Ø 65 Tube Extrusion Profile

Uses: End Rafters /
Hip Rafters
Material:
6261T6 Anodised Aluminium
Ultimate Tensile Strength:
295 mpa
Yield Strength: 255 mpa

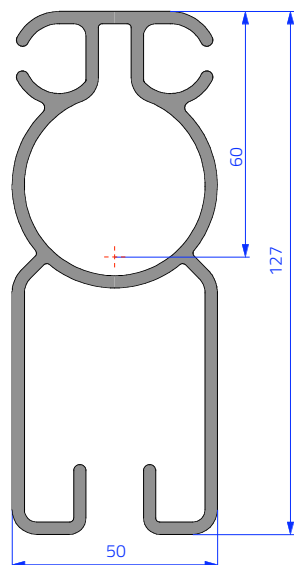

Channel Tube Extrusion Profile

Uses: Side Rafter
Material:
6261T6 Anodised Aluminium
Ultimate Tensile Strength: 295 mpa
Yield Strength: 255 mpa

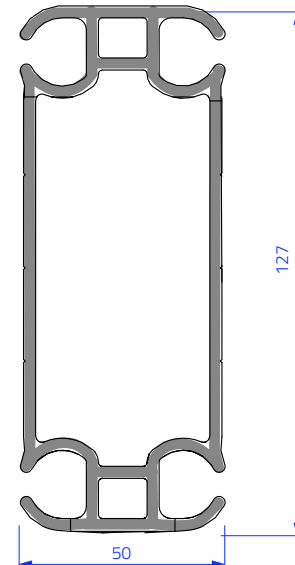

CAN BE USED AS ALTERNATIVE TO CHANNEL TUBE EXTRUSION: Channel Tube Extrusion Profile - 4 Track

Uses: Side Rafter
Material:
6261T6 Anodised Aluminium
Ultimate Tensile Strength: 295 mpa
Yield Strength: 255 mpa

New Zealand


52 Newton Street,
PO Box 4370, Mount Maunganui
New Zealand

tel +64 7 579 0190
info@baytex.co.nz
www.baytex.co.nz

Australia


toll free 1800 766 661
info@baytex.com.au
www.baytex.com.au

Clipframe Alloy Extrusions 5m & 10m - 5m Bays

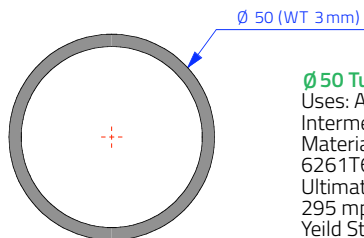

Ø 50 Tube Extrusion Profile


Uses: Apex Brace,
Intermediate Purlin
Material:
6261T6 Anodised Aluminium
Ultimate Tensile Strength:
295 mpa
Yield Strength: 255 mpa



Ø 65 Tube Extrusion Profile


Uses: Gable Upright, Ridge Purlin, Eave Purlin,
End Rafter, Legs
Material:
6261T6 Anodised Aluminium
Ultimate Tensile Strength: 295 mpa
Yield Strength: 255 mpa

Ø 65 (WT 3.5mm)

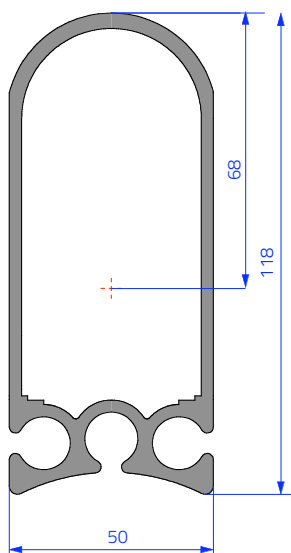



Alirail Extrusion Profile

Uses: Hip Rafter (10m Hip End only)
Material:
6261T6 Anodised Aluminium
Ultimate Tensile Strength: 295 mpa
Yield Strength: 255 mpa

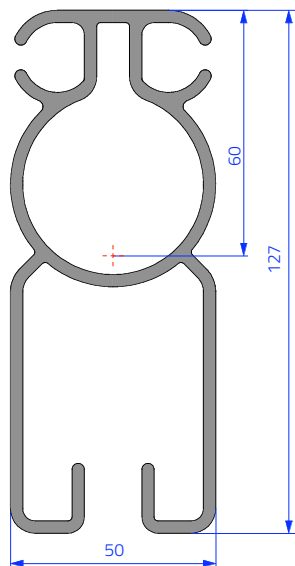

Channel Tube Extrusion Profile

Uses: Side Rafter
Material:
6261T6 Anodised Aluminium
Ultimate Tensile Strength: 295 mpa
Yield Strength: 255 mpa

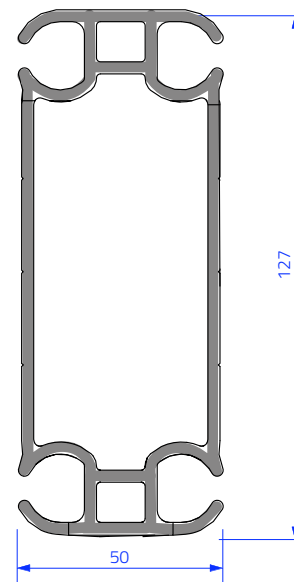

CAN BE USED AS ALTERNATIVE
TO CHANNEL TUBE EXTRUSION:
**Channel Tube Extrusion Profile
- 4 Track**

Uses: Side Rafter
Material:
6261T6 Anodised Aluminium
Ultimate Tensile Strength: 295 mpa
Yield Strength: 255 mpa

New Zealand

52 Newton Street,
PO Box 4370, Mount Maunganui
New Zealand

tel +64 7 579 0190
info@baytex.co.nz
www.baytex.co.nz

Australia

toll free 1800 766 661
info@baytex.com.au
www.baytex.com.au