



MARQUEE


Alispan Alloy Extrusions




65x65x3 Tube Extrusion Profile
 Uses: Intermediate Rolled Arch Purlins
 Material:
 6005A T6 Anodised Aluminium
 Ultimate Tensile Strength: 280 mpa
 Yield Strength: 230 mpa

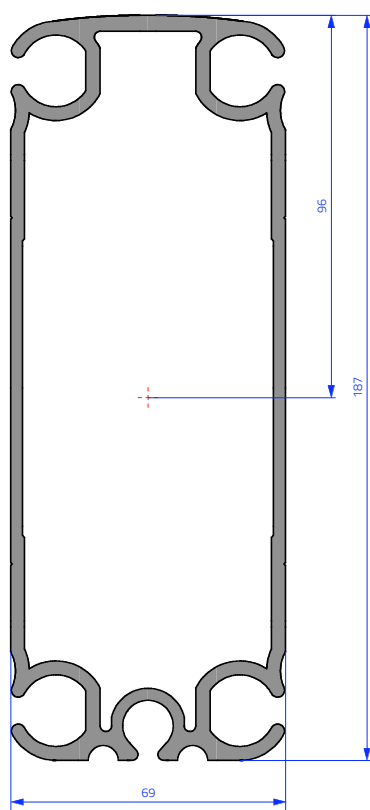

Alibeam Extrusion Profile
 Uses: Rafters & Legs
 Material:
 6061 T6 Anodised Aluminium
 Ultimate Tensile Strength: 310 mpa
 Yield Strength: 270 mpa

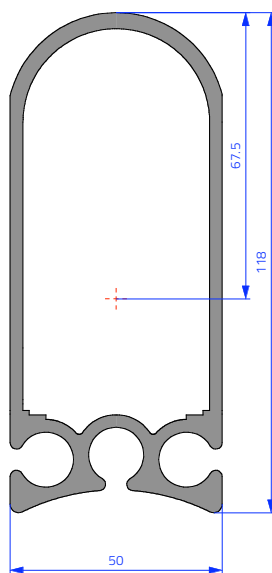

OPT 1: Alirail Extrusion Profile
 Uses: Apex & Eave Purlins, Gable Eave Purlin
 Material:
 6005A T6 Anodised Aluminium
 Ultimate Tensile Strength: 280 mpa
 Yield Strength: 230 mpa

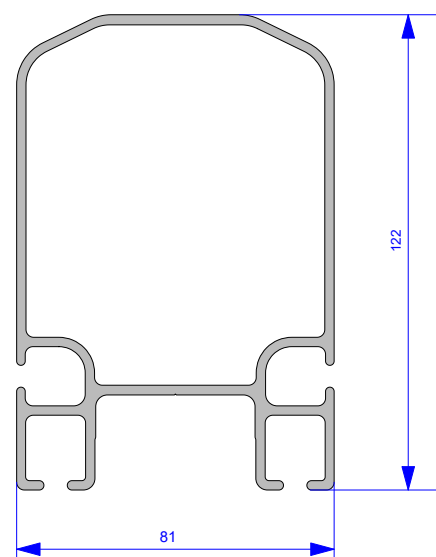

OPT 2: Alirail Extrusion Profile
 Uses: Apex & Eave Purlins, Gable Eave Purlin
 Material:
 6005A T6 Anodised Aluminium
 Ultimate Tensile Strength: 280 mpa
 Yield Strength: 230 mpa

New Zealand

52 Newton Street,
 PO Box 4370, Mount Maunganui
 New Zealand

tel +64 7 579 0190
info@baytex.co.nz
www.baytex.co.nz

Australia

toll free 1800 766 661
info@baytex.com.au
www.baytex.com.au