



MARQUEE


Alimax Alloy Extrusions



65x65x3 Tube Extrusion Profile
Uses: Intermediate Rolled Arch Purlins
Material:
6005A T6 Anodised Aluminium
Ultimate Tensile Strength: 280 mpa
Yield Strength: 230 mpa

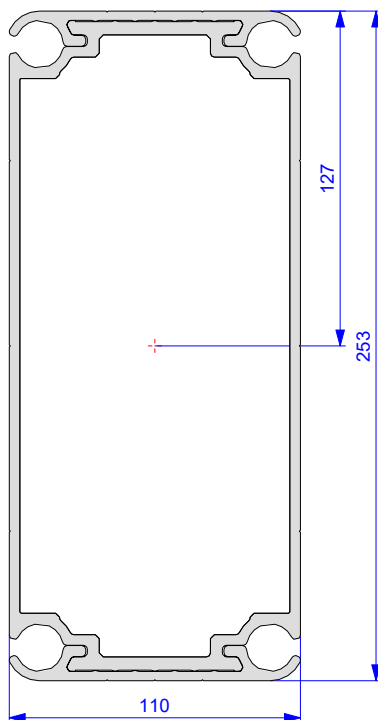

Alimax Extrusion Profile
Uses: Rafters & Legs
Material:
6061 T6 Anodised Aluminium
Ultimate Tensile Strength: 310 mpa
Yield Strength: 270 mpa

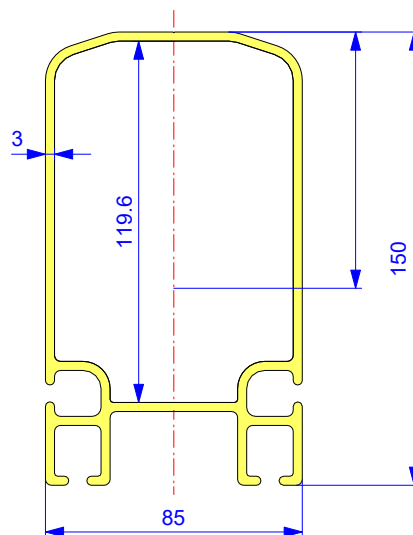

Alimax Eave Extrusion Profile
Uses: Alimax Eave & Apex Purlin
Material:
6005A T6 Anodised Aluminium
Ultimate Tensile Strength: 280 mpa
Yield Strength: 230 mpa

New Zealand

52 Newton Street,
PO Box 4370, Mount Maunganui
New Zealand

tel +64 7 579 0190
info@baytex.co.nz
www.baytex.co.nz

Australia

toll free 1800 766 661
info@baytex.com.au
www.baytex.com.au