



Hampton Marquee - 9.7m Series

Roof & Pole Installation





Step 1

- Run String Line through chosen center line.
- Refer Pegging Plan of selected configuration length.
- Mark Centre Pole Locations.
- Place temporary pins at End Centre Poles.
- Place temporary pins at End Peg Reference Points.

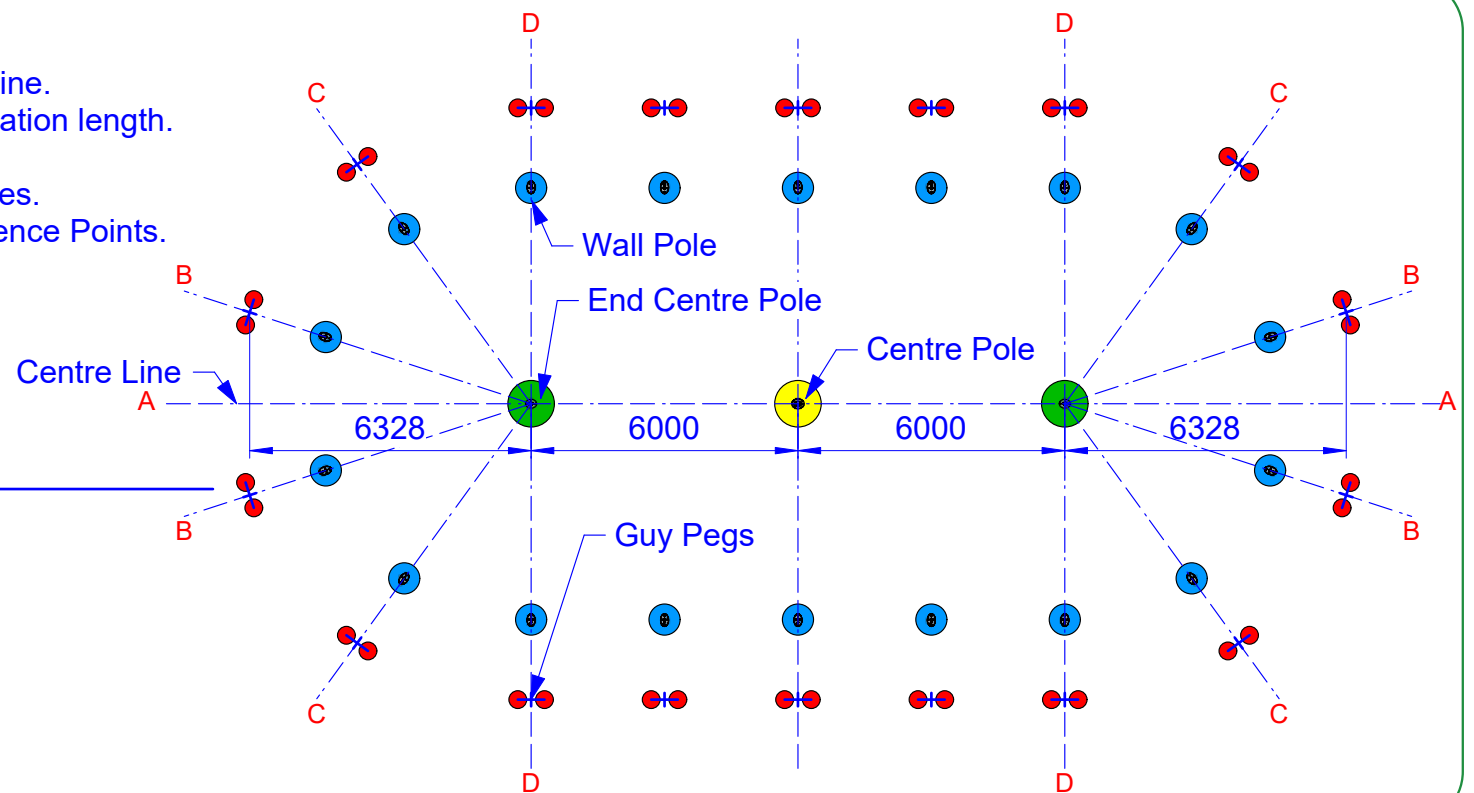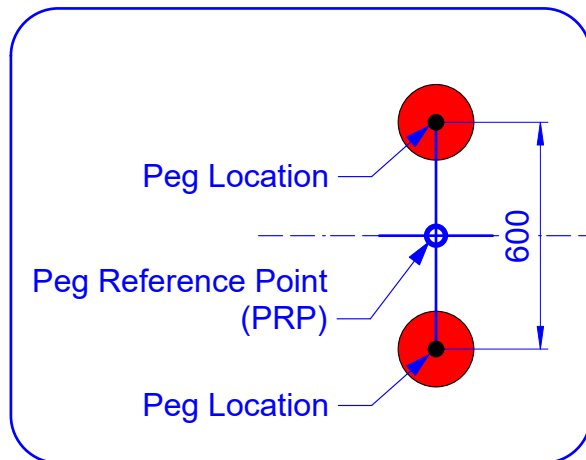



Step 2

- Locate position for side wall pole (4) and PRP.
- use marking out tape
- sisterclips not connected for large triangle.
- steel ring at right angle on End Centre Pole.
- second steel ring on End PRP.
- mark wall pole locations
- place temporary pin at side PRP.

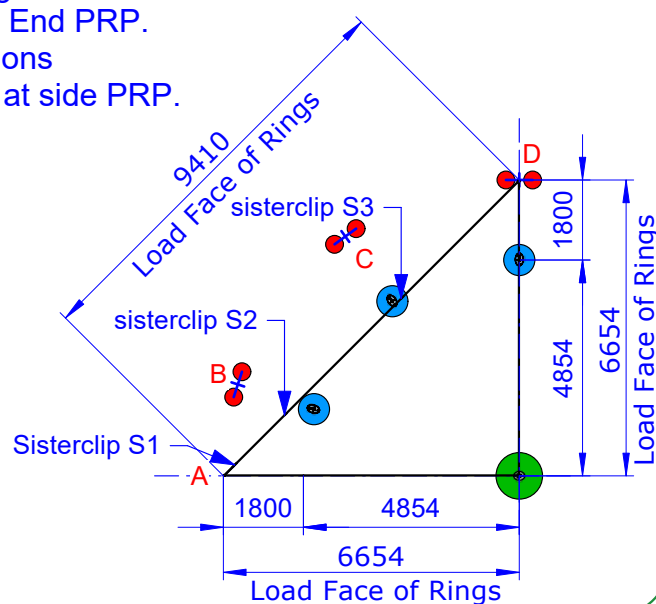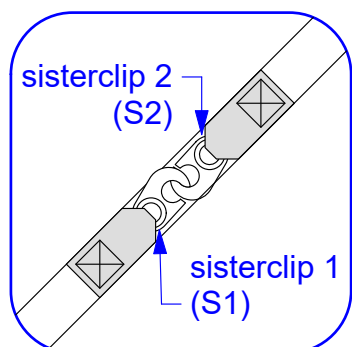


Step 3

- Locate position for end division wall pole and PRP.
- use marking out tape
- sisterclips S1 and S3 together for small triangle.
- steel ring at 30° angle on End Centre Pole.
- second steel ring on End PRP.
- mark wall pole location.
- Pegs at 600mm square to wall pole

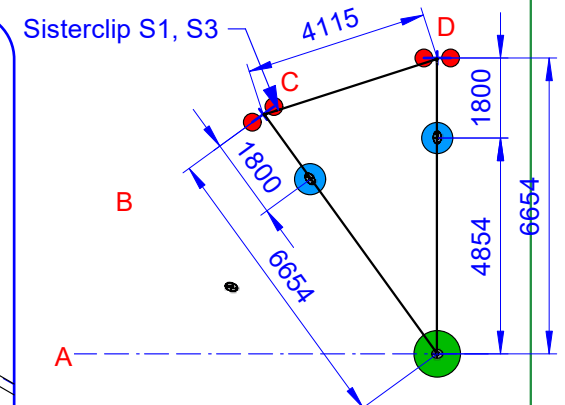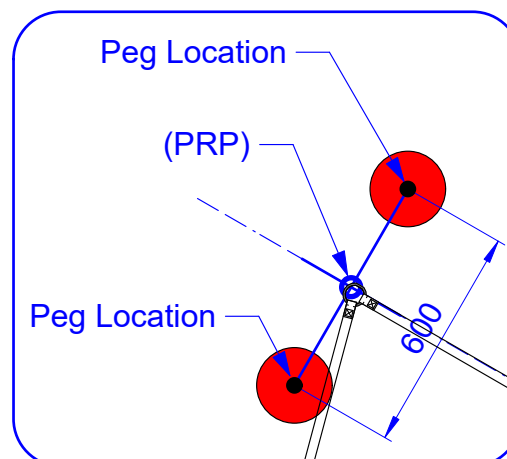

Step 4

- Locate position for end division wall pole and PRP.
- use marking out tape
- sisterclips S1 & S3 set for Medium triangle.
- steel ring at 30° angle on End Centre Pole.
- second steel ring on Side PRP.
- mark wall pole location.
- Pegs at 600mm square to wall pole

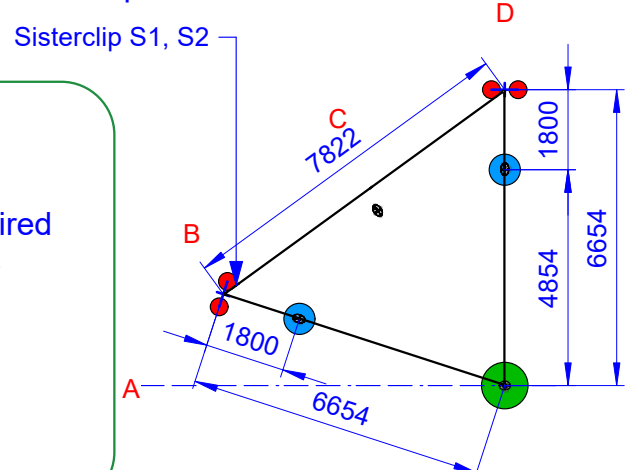

Step 5

- Repeat Steps 2 - 4.
- flip orientation as required to complete both Ends

Step 6

- Locate position for remaining side wall pole and PRP.
- Run string line between Side PRPs.
- wall poles and PRPs at 3000mm spacings.
- Pegs at 600mm. on string line.

