

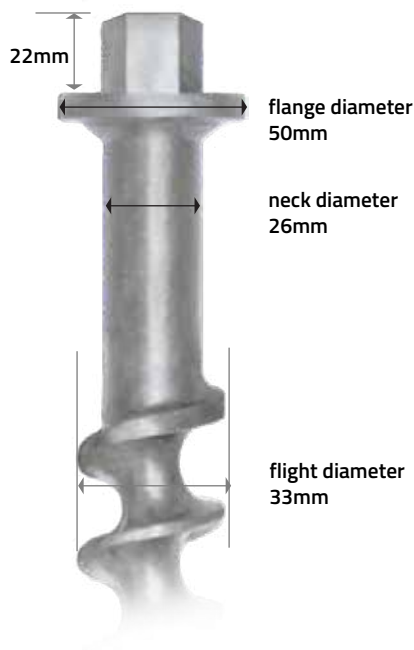


PE18-33 specifications

- Aircraft-quality cast aluminium 356 alloy
- Heat-treated to T6 specification
- Install with 1" socket
- Removable

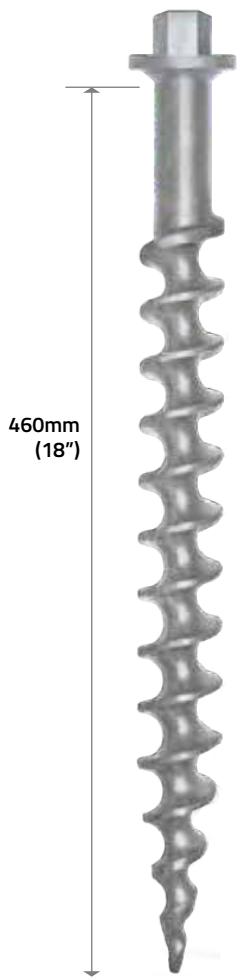

Baytex Earth Anchor Range

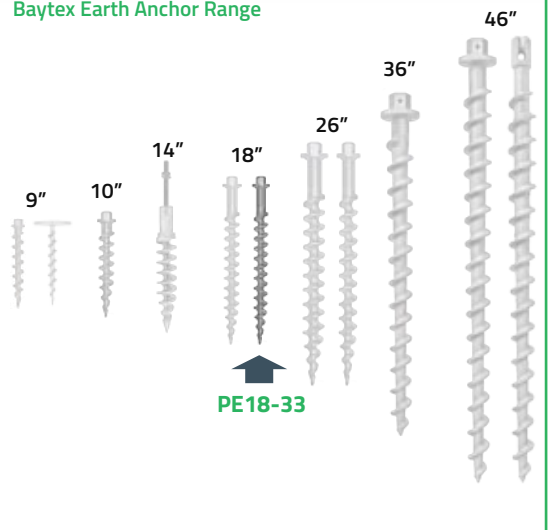


socket size 1"



6-point socket (instead of a 12-point socket) will minimise wear and rounding of hex head for repeated installation/removal

LOAD CAPACITY
Pullout strength
with flight fully embedded



SOIL CLASS	
1	hardpan/asphalt/clay
2	Cohesive soil
3	Medium density soil
4	Loose med-to-fine sand
5	Loose fine uncompacted sand

PE18-33
46cm
(18")

10.03 kN (1023 kg)
5.88 kN (600 kg)
2.08 kN (212 kg)
1.22 kN (124 kg)
0.70 kN (71 kg)

Earth Anchors - PE18-33

SIMPLICITY · PERFORMANCE · STYLE



PE18-33 installation



Pre drill pilot hole with impact wrench (this determines holding power). Earth Anchor can then be installed.




pilot hole through asphalt or hardpan soil

install at same angle as load for maximum pullout strength



non-vertical load

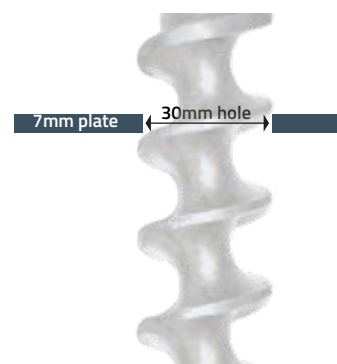


through a metal plate

accessories sold separately



can be doubled over to make large loop around structural member

10" Tie-off cable

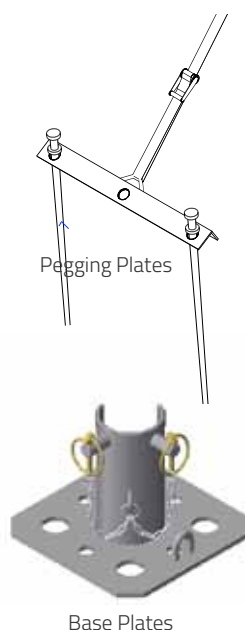

Base Plates



installation tools



soil auger 1 1/16"

or asphalt/hardpan/clay auger 1"

application suggestions



marquees



glamping



tipis

New Zealand

52 Newton Street,
PO Box 4370, Mount Maunganui
New Zealand

tel +64 7 579 0190
fax +64 7 579 0194
www.baytex.co.nz

Australia

tel 02 4340 4144
mob 0400 312 314

