



PE26-33 specifications

- Aircraft-quality cast aluminium 356 alloy
- Heat-treated to T6 specification
- Install with 1" socket
- Removable

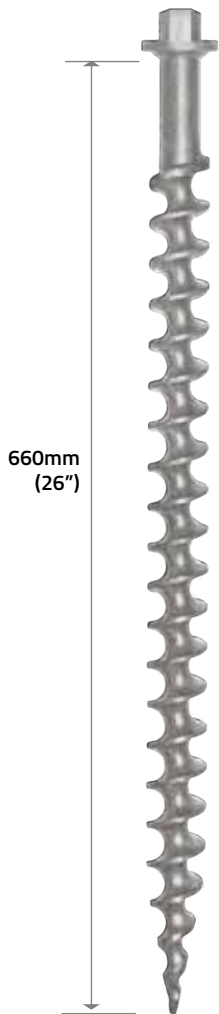

660mm
(26")

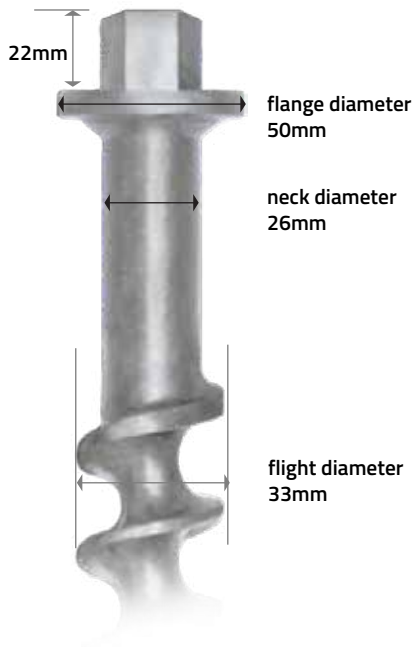

22mm

flange diameter
50mm


neck diameter
26mm

flight diameter
33mm

socket size 1"



6-point socket
(instead of a
12-point socket) will
minimise wear and
rounding of hex head
for repeated
installation/removal

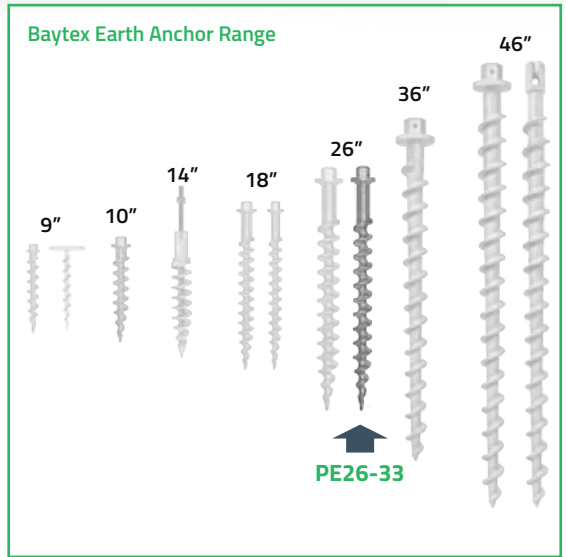

LOAD CAPACITY
Pullout strength
with flight fully embedded



SOIL CLASS	
1	hardpan/asphalt/clay
2	Cohesive soil
3	Medium density soil
4	Loose med-to-fine sand
5	Loose fine uncompacted sand

PE26-33
66cm
(26")

15.6 kN (1590 kg)
10.8 kN (1097 kg)
3.81 kN (388kg)
2.18 kN (222 kg)
(127 kg)

Earth Anchors - PE26-33


SIMPLICITY · PERFORMANCE · STYLE



PE26-33 installation




Pre drill pilot hole with impact wrench (this determines holding power). Earth Anchor can then be installed.

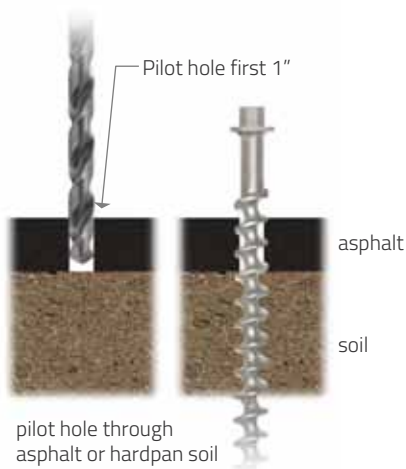

install at same angle as load for maximum pullout strength




non-vertical load

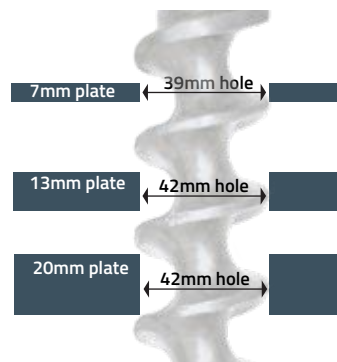


through a metal plate

accessories sold separately

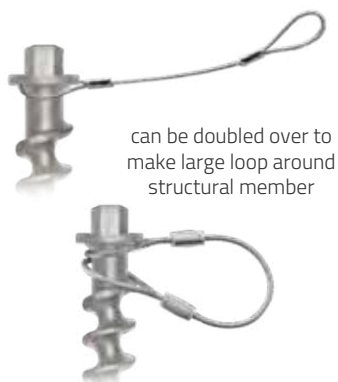

10" Tie-off cable

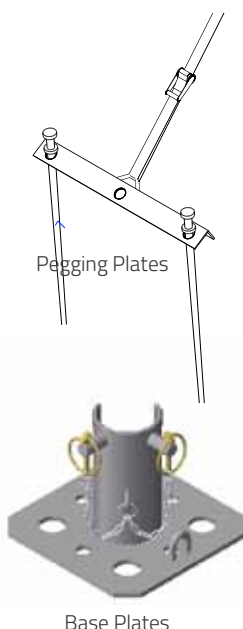

application suggestions



marquees



glamping



tipis

New Zealand

52 Newton Street,
PO Box 4370, Mount Maunganui
New Zealand

tel +64 7 579 0190
fax +64 7 579 0194
www.baytex.co.nz

Australia

tel 02 4340 4144
mob 0400 312 314

