



MARQUEE

SQ Frame Alloy Extrusions




Ø 50 (WT 3mm)

Ø 50 Tube Extrusion Profile
Uses: Intermediate Purlin
Material:
6261T6 Anodised Aluminium
Ultimate Tensile Strength:
295 mpa
Yield Strength: 255 mpa




Ø 65 (WT 3.5mm)

Ø 65 Tube Extrusion Profile
Uses: Apex Purlin
Material:
6261T6 Anodised Aluminium
Ultimate Tensile Strength:
295 mpa
Yield Strength: 255 mpa

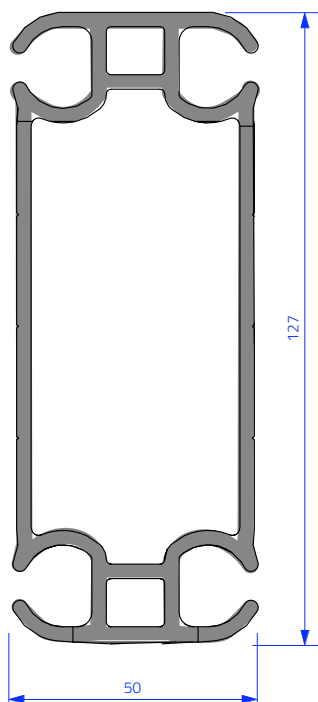

Channel Tube 4 Track
Uses: Rafters, Legs,
Material:
6261T6 Anodised Aluminium
Ultimate Tensile Strength: 295 mpa
Yield Strength: 255 mpa

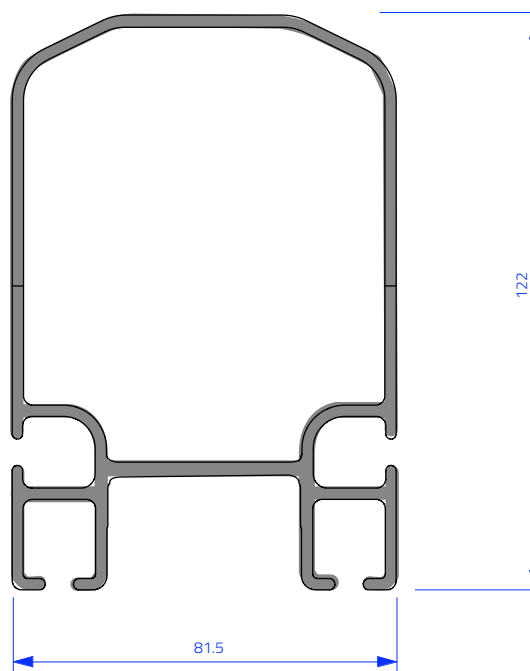

SQ Extrusion
Uses: Eaves
Material:
6005AT6 Anodised Aluminium
Ultimate Tensile Strength:
Yield Strength:

New Zealand

52 Newton Street,
PO Box 4370, Mount Maunganui
New Zealand

tel +64 7 579 0190
info@baytex.co.nz
www.baytex.co.nz

Australia

toll free 1800 766 661
info@baytex.com.au
www.baytex.com.au