

CARNIVAL CANOPY 460

Installation Instructions



CANOPY COMPONENTS:

- 1 x Roof in Bag
- 2 x Centre Poles
- 8 x Peg Steel Canopy 15mmx550mm
- 2 x Peg Steel Wall 8mmx300mm
- 2 x Peg Canopy 12mmx550mm
- 1 x Peg Sleeves
- 1 x Frame Bag




PROCEDURE:

- Consider wind and ground conditions for duration of canopy installation.
- Wind should not exceed 15-18 knots
- Ground should be firm for pegs.

Step 1


- Locate positions of the Centre Poles as follows:
- Using a small Tent Pin, locate the ring closest to the bag at a suitable Centre Pole location.
- Pull the second ring out tightly in the desired direction of the second Centre Pole.
- Mark the position of the second Centre Pole by locating another Tent Pin at the end of the White tape.

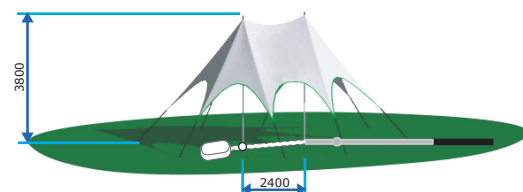

Step 2

Locate positions of the Side Pegs as follows:


- Pin the ring closest to the bag to a Centre Pole location.
- Hold the end of the BLACK tape onto the other Centre Pole location.
- Complete the triangulation by pulling on the Free Ring until both tapes are tight.
- Centre of the Free Ring is the position of the first Side Peg.
- Repeat this operation for the remaining three Side Pegs.

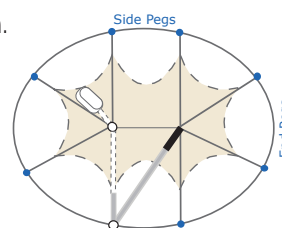

Step 3

Locate positions of the End Pegs as follows:

- Pin the ring closest to the bag to a Centre Pole location.
- Hold the end of the GREY tape onto an adjacent Side Peg location.
- Complete the triangulation by pulling on the free ring until both tapes are tight.
- Centre of the Free Ring is the position of the first End Peg.
- Repeat this operation for the remaining three End Pegs.

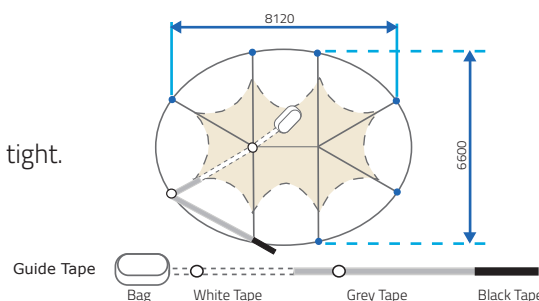

Step 4

- Attach Guy Ropes to each of the Pegs and raise the Centre Poles.
- Tension the Guy Ropes evenly and adjust the position of the pegs if necessary.

New Zealand

52 Newton Street,
PO Box 4370, Mount Maunganui
New Zealand

tel +64 7 579 0190
fax +64 7 579 0194
www.baytex.co.nz

Australia

tel 02 4340 4144
mob 0400 312 314