

ELECTRON PARTY 680

Installation Instructions



CANOPY COMPONENTS:


- 1 x Roof in Bag
- 4 x 6m Walls & Wall Bag
- 2 x Centre Poles
- 8 x Wall Poles with standard feet
- 1x Frame Bag
- 8 x Marquee Pegs 24mmx850mm
- 35 x Peg Steel Wall 8mmx300mm in Bag
- 2 x Peg Canopy 12mmx550mm
- 2 x Peg Sleeves
- 1 x Marking Tape




PROCEDURE:

- Consider wind and ground conditions for duration of canopy installation ■ Wind should not exceed 15-18 knots
- Ground should be firm for pegs.

Using the layout tape provided, follow diagrams 1 - 8 to mark the locations of the pegs.

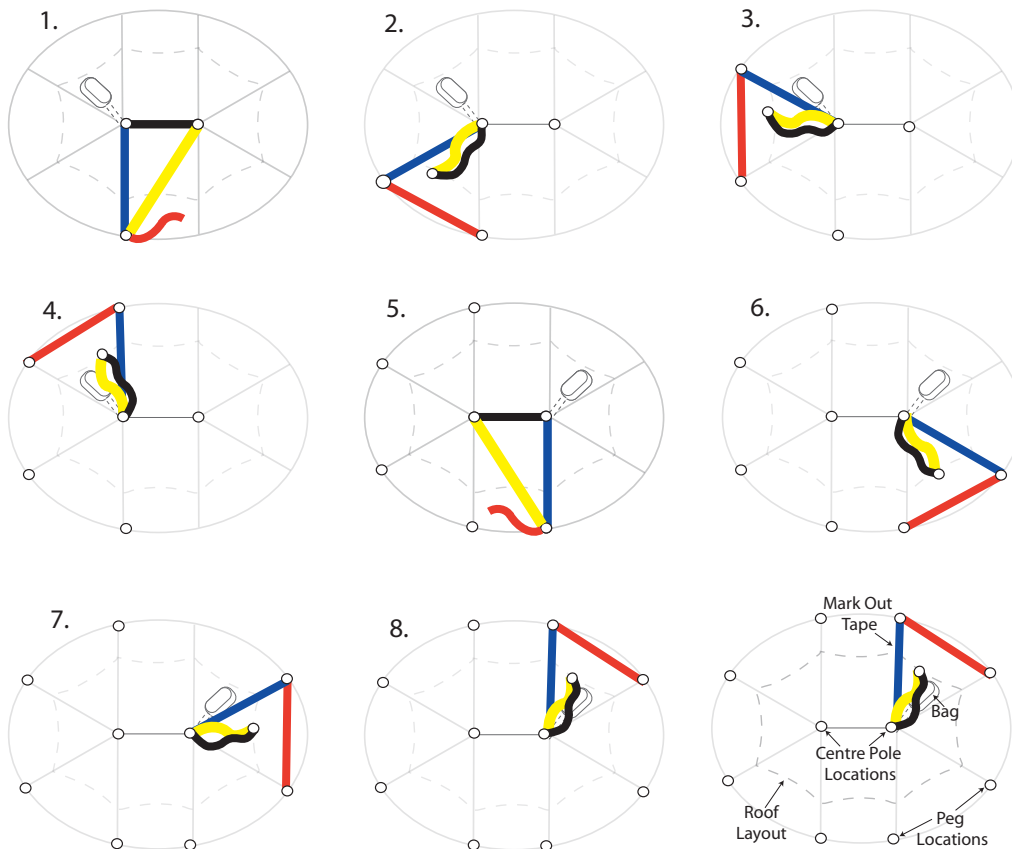

- Ensure all pegs are driven correctly.
- Eyes for the guy rope hooks face inwards.

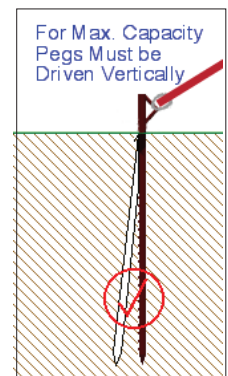

- Once all pegs are driven into place, position canopy roof in centre of pegs as outlined in diagrams 1 - 8
- Attach loosely tensioned guy rope to pegs ■ Install wall poles and centre poles.
- Adjust poles as required ■ Apply even tension to all guy ropes.
- Hook walls up using the hooks attached onto the wall rope on the roof

New Zealand

52 Newton Street,
PO Box 4370, Mount Maunganui
New Zealand

tel +64 7 579 0190
fax +64 7 579 0194
www.baytex.co.nz

Australia

tel 02 4340 4144
mob 0400 312 314