

# CARNIVAL CANOPY 680

## Installation Instructions



### CANOPY COMPONENTS:

- 1 x Roof in Bag
- 2 x Centre Poles
- 8 x Marquee Pegs 24mmx850mm
- 2 x Peg Steel Wall 8mmx300mm
- 2 x Peg Canopy 12mmx550mm
- 2 x Peg Sleeves
- 1 x Frame Bag



### PROCEDURE:


- Consider wind and ground conditions for duration of canopy installation.
- Wind should not exceed 15-18 knots
- Ground should be firm for pegs.

### Step 1

Total area required by canopy and guys is 10mx8m.

Locate positions of the Centre Poles as follows:


- Using a small Tent Pin, locate the ring closest to the bag at a suitable Centre Pole location.
- Pull the second ring out tightly in the desired direction of the second Centre Pole.
- Mark the position of the second Centre Pole by locating another Tent Pin at the end of the White tape.

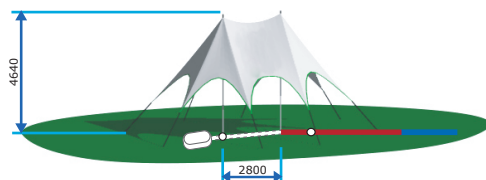

### Step 2

Locate positions of the Side Pegs as follows:


- Pin the ring closest to the bag to a Centre Pole location.
- Hold the end of the BLUE tape onto the other Centre Pole location.
- Complete the triangulation by pulling on the Free Ring until both tapes are tight.
- Centre of the Free Ring is the position of the first Side Peg.
- Repeat this operation for the remaining three Side Pegs.

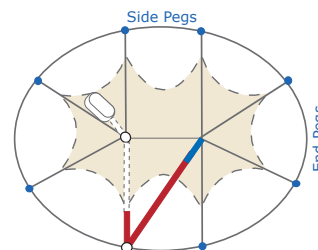

### Step 3

Locate positions of the End Pegs as follows:

- Pin the ring closest to the bag to a Centre Pole location.
- Hold the end of the RED tape onto an adjacent Side Peg location.
- Complete the triangulation by pulling on the free ring until both tapes are tight.
- Centre of the Free Ring is the position of the first End Peg.
- Repeat this operation for the remaining three End Pegs.

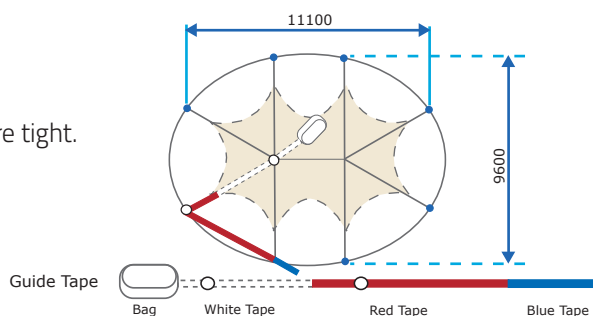

### Step 4

- Attach Guy Ropes to each of the Pegs and raise the Centre Poles.
- Tension the Guy Ropes evenly and adjust the position of the pegs if necessary.

#### New Zealand

52 Newton Street,  
PO Box 4370, Mount Maunganui  
New Zealand

tel +64 7 579 0190  
fax +64 7 579 0194  
www.baytex.co.nz

#### Australia

tel 02 4340 4144  
mob 0400 312 314